


LA7550



3067

Monolithic Linear IC

IF Signal Processing (VIF+SIF) Circuit for TV/VTR

©2654

The LA7550 is a full sync detection method VIF+SIF monolithic linear IC using a PLL. It has excellent 920kHz beat and buzz beat characteristics, making it ideal for audio multiplexing and high-quality AV equipment.

Functions

- . VIF Section
 - . VIF amp
 - . AFT
 - . SIF Section
 - . SIF limiter amp
 - . Audio Section
 - . DC attenuator
 - . Muting
 - . Audio muting (pin 2)
 - . AFT defeat (pin 14)
 - . Video sync detection
 - . VCO
 - . FM quadrature detection
 - . AF driver
 - . Audio-Video simultaneous muting (pins 10, 13)
- . IF AGC
 - . APC DET
 - . B/W NC
 - . Lock DET
 - . RF AGC


Features

- . 24-pin DIP shrink package being the smallest one for PLL ICs
- . Excellent 920kHz beat characteristics
- . Excellent buzz beat characteristics
- . High-gain VIF amp
- . High-speed AGC possible


Maximum Ratings at Ta=25°C

Parameter	Symbol	Value	unit
Maximum Supply Voltage	V _{CC} max	13.8	V
Allowable Power Dissipation	P _d max	1200	mW
Operating Temperature	T _{op}	-20 to +70	°C
Storage Temperature	T _{stg}	-55 to +150	°C
Circuit Voltage	V ₁₂ , V ₁₃	V _{CC}	V
	V ₁₆	V _{CC}	V
	V ₂₂	V _{CC}	V
	V ₂₃	V _{CC}	V

Continued on next page.

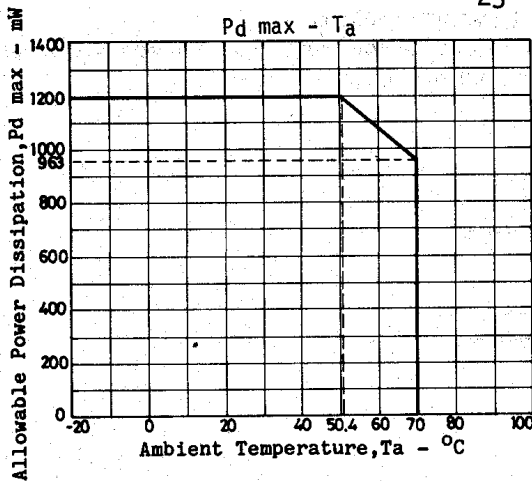

Case Outline 3067-D24SIC (unit:mm)

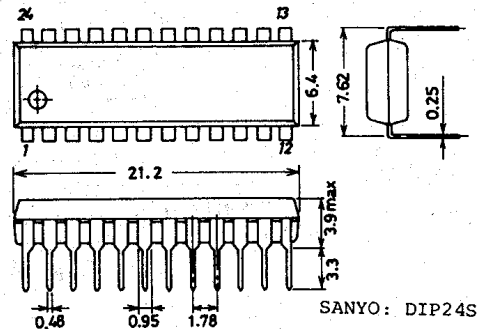

9187TA, TS No. 2654-1/10

LA7550

Continued from preceding page.

Circuit Current	I_5	-3	mA	unit
	I_{21}	-5	mA	
	I_{22}	2	mA	

Note: Assumes that the current to the IC is positive (no sign) and current from the IC is negative.

Operating Conditions at $T_a=25^\circ\text{C}$

Recommended Supply Voltage	V_{CC}	12	V	unit
Operating Voltage Range	$V_{CC\text{ op}}$	10 to 13.2	V	

Operating Characteristics at $T_a=25^\circ\text{C}$

[VIF Section]		Test		min	typ	max	unit
Circuit Current	I_6+I_{17}	$S1=on, V_{13}=11V$	Pins6,17	45	57	71	mA
Quiescent Video	V_{21}	$S1=on, V_{13}=11V$	Pin21	5.8	6.2	6.6	V
Output Voltage							
Maximum RF AGC Voltage	V_{11H}	$S1=off, V_{13}=11V$	Pin11	10.6	11	11.4	V
Minimum RF AGC Voltage	V_{11L}	$S1=on, V_{13}=11V$	Pin11		0	0.5	V
Quiescent AFT	V_{16}	$S1=on, V_{13}=11V$	(B)	3.5	6.5	7.5	V
Output Voltage							
Input Sensitivity	V_i	$S1\rightarrow off, S2\rightarrow (a)$	(A)	33	39	45	dB/uV
AGC Range	GR	$S1\rightarrow on, S2\rightarrow (a)$	(A)	60	65		dB
Maximum Allowable Input	$V_i\text{ max}$	$S1\rightarrow on, S2\rightarrow (a)$	(A)	100	200		mVrms
Video Output Amplitude	$V_o(\text{video})$	$S1\rightarrow on, S2\rightarrow (a)$	(A)	1.9	2.2	2.5	Vp-p
Output S/N	S/N	$S1\rightarrow on, S2\rightarrow (a)$	(A)	49	53		dB
Sync Signal Tip Voltage	$V_{21\text{ tip}}$	$V_i=10mV, S1=on$	(A)	3.4	3.65	3.9	V
920kHz Beat Level	I_{920}	$P=0, S1=on,$ $C=-4dB, S=-14dB(2Vp-p)$	(A)	38	46		dB
Frequency Characteristic	f_c	$P=0, S=-14dB$	(A)	6	7		MHz
SIF Output Signal Voltage	$V_o(\text{SIF})$	$P=0, S=-20dB$	(A)	110	180	260	mVrms
Differential Gain	DG	$f_p=58.75MHz,$ $V_i=10mV, \text{mod } 87.5\%,$ video signal	(A)		5	10	%
Differential Phase	DP	$f_p=58.75MHz,$ $V_i=10mV, \text{mod } 87.5\%,$ video signal	(A)		3	10	deg
White Noise	V_{WTH}		(A)	6.4	6.8	7.2	V
Threshold Voltage							
White Noise	V_{WCL}		(A)	4.2	4.6	5.0	V
Clamping Voltage							
Black Noise	V_{BTH}	$S1\rightarrow on, S2\rightarrow (a)$	(A)	2.3	2.6	2.9	V
Threshold Voltage							
Black Noise	V_{BCL}	$S1\rightarrow on, S2\rightarrow (a)$	(A)	4.1	4.5	4.9	V
Clamping Voltage							
Maximum AFT Voltage	V_{16H}	$S2\rightarrow (a)$	(B)	11.0	11.5	12.0	V
Minimum AFT Voltage	V_{16L}	$S2\rightarrow (a)$	(B)	0	0.5	1.0	V
AFT Detection Sensitivity	S_f	$S2\rightarrow (a)$	(B)	37	50	70	mV/kHz
Input Resistance	r_i	$f=58.75MHz$		0.8	1.3	1.75	kohm
Input Capacity	c_i	$f=58.75MHz$			3.0	6.0	pF
APC Pull-in Range(U)1	f_{PU-1}	$S1\rightarrow on, S2\rightarrow (b)$	(A)	+0.5	0.8		MHz
APC Pull-in Range(L)1	f_{PL-1}	$S1\rightarrow on, S2\rightarrow (b)$	(A)		-0.8	-0.5	MHz
APC Pull-in Range(U)2	f_{PU-2}	$S1\rightarrow on, S2\rightarrow (a)$	(A)	+0.6	+2		MHz
APC Pull-in Range(L)2	f_{PL-2}	$S1\rightarrow on, S2\rightarrow (a)$	(A)		-2	-1.25	MHz

Continued on next page.

Continued from preceding page.

			Test Point	min	typ	max	unit
Lock Detection Threshold Voltage	V_{13TH}	S3→(b)	Pin22	11	11.5		V
VCO Maximum Variable Range	Δf_U	S1=on, $V_{20}=4V$	(A)	0.5	2.1		MHz
VCO Maximum Variable Range	Δf_L	S1=on, $V_{20}=8V$	(A)		-2.1	-1.2	MHz
VCO Control Sensitivity [SIF Section]	β	$V_{20}=6V$ to $5.6V$	(A)	1.4	2.8	5.6	kHz/mV
SIF Limiting Voltage	$V_i(lim)$	$V_{13}=10V$	(C)		250	500	μV_{rms}
FM Detection Output Voltage	V_o	$V_{13}=10V$	(C)	-5.1	-1.5	+0.5	dBs*
AM Rejection Distortion [Audio Section]	AMR THD(Det)	$V_{13}=10V$ $V_{13}=10V$	(C)	40	55		dB
DC VR Maximum Attenuation	A_{TT}	$V_{23}=8V \rightarrow 0V, V_{13}=10V$	(D)	70	75		dB
AF Amp Voltage Gain	G_{AF}	$V_{23}=8V, V_{13}=10V$	(D)	18	20	22	dB
AF Amp Distortion	THD(AF)	$V_{23}=8V, V_{13}=10V, f=400Hz$	(D)		0.5	1	%
AF Amp Maximum Output Voltage	$V_o \max(AF)$	$V_{23}=8V, V_{13}=10V$	(D)	3	4		V_{rms}

*: 0dBs=0.7745Vrms

Equivalent Circuit Block Diagram

